



WARN® ZEON™ 8-S Winch


Truck/SUV winch equipped with Spydura™ synthetic rope and an 8,000 lb. capacity.

The next generation of winches is here: WARN® ZEON™. With a modern rugged design, upgraded internal components, and increased performance and durability, ZEON is a new name from the most trusted name in winches. With a bold look and power to match, the ZEON is like nothing you've ever seen before.

- Legendary WARN reliability and performance; 8,000 lb. (3630 kg) capacity – perfect for trucks and SUVs
- Includes 100' of 3/8" WARN Spydura™ synthetic rope, a temperature-resistant sleeve on the first layer, a ballistic nylon sliding sleeve for abrasion resistance, and a polished aluminum hawse fairlead
- Unique exterior styling and symmetrical design give this winch a look that is advanced, capable, and strong
- New-design planetary geartrain and series-wound motor deliver fast, quiet, and reliable pulling power
- Satin-black powder-coated finish with stainless steel fasteners and clutch lever looks great and inhibits corrosion
- Ultra-durable rubberized corded remote with 12' lead
- Convertible control pack can be attached to the winch or remotely mounted, allowing for various winch mounting options and looks (Relocation kit required and sold separately)
- Large diameter, aluminum winch drum reduces rope wear, is light weight, and has an integrated rope anchor for easy rope installation
- Robust aluminum housing is durable and helps dissipate heat
- Improved winch sealing to keep the elements out; IP68 rated
- Contactor control for extreme reliability and weather resistance
- Automatic mechanical cone brake holds the full-rated load and offers excellent control while winching

PN 89670 (CE, for International sales only)



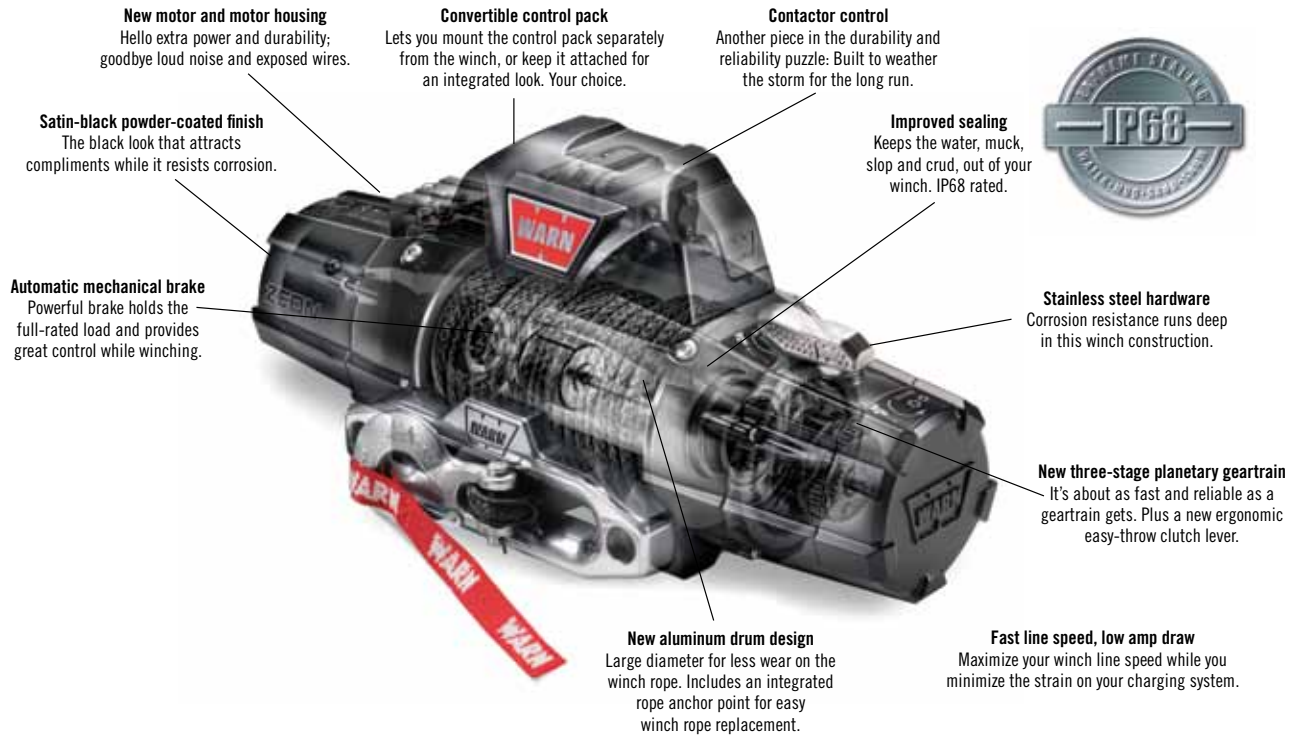


SPECIFICATIONS

- Winch model:** WARN ZEON 8-S
- Part numbers:** 89670 (CE, International only)
- Rated line pull:** 8000 lbs. (3630 kg) single-line
- Motor:** 12V DC, series wound
- Electrical controls:** Contactor
- Remote Control:** Remote switch, 12' (3.7m) lead
- Geartrain:** 3-stage planetary
- Gear ratio:** 162:1
- Clutch (freespooling):** Rotating ring gear
- Brake:** Automatic mechanical cone
- Drum diameter/Length:** 3.15"/9.0" (80mm/229mm)
- Weight (kit shipping):** 75 lbs. (34 kg)
- Rope:** 3/8" x 100' (9.5mm x 30.5m) Spydura synthetic
- Fairlead:** Hawse
- Recommended Battery:** 650 CCA minimum for winching
- Battery leads:** 25mm² gauge, 72" (1.83m)
- Finish:** Satin-black powder coat

12V DC performance specs (first layer of drum)

Line Pull Lbs. (Kg)	Line Speed Ft./min. (M/min.)	Motor Current
0	42 (12.8)	63.5 amps
2000 (910)	17.2 (5.2)	167 amps
4000 (1810)	11.7 (3.6)	255 amps
6000 (2720)	8.5 (2.6)	335 amps
8000 (3630)	6.2 (1.9)	413 amps

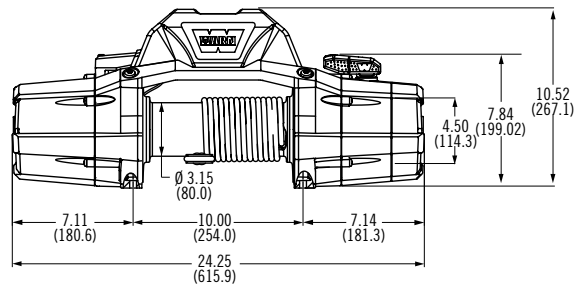

Winch dimensions:

Integrated configuration: 24.25" L x 7.15" D x 10.52" H
 (615.9mm L x 181.6mm D x 267.1mm H)
 Low-profile configuration: 24.25" L x 7.15" D x 7.84" H
 (615.9mm L x 181.6mm D x 199.02mm H)

Mounting bolt pattern:

10.0" x 4.5"
 (254mm x 114.3mm)

Warn Industries, Inc.
 12900 S.E. Capps Road,
 Clackamas, OR USA 97015-8903



International Sales Support:
 +1 503 722 1200
 www.warn.com