




**DoorBird**  
Technology meets Design.



# DOORBIRD I/O DOOR CONTROLLER A1081

Designed,  
developed and  
made in Germany

## DOORBIRD I/O DOOR CONTROLLER A1081

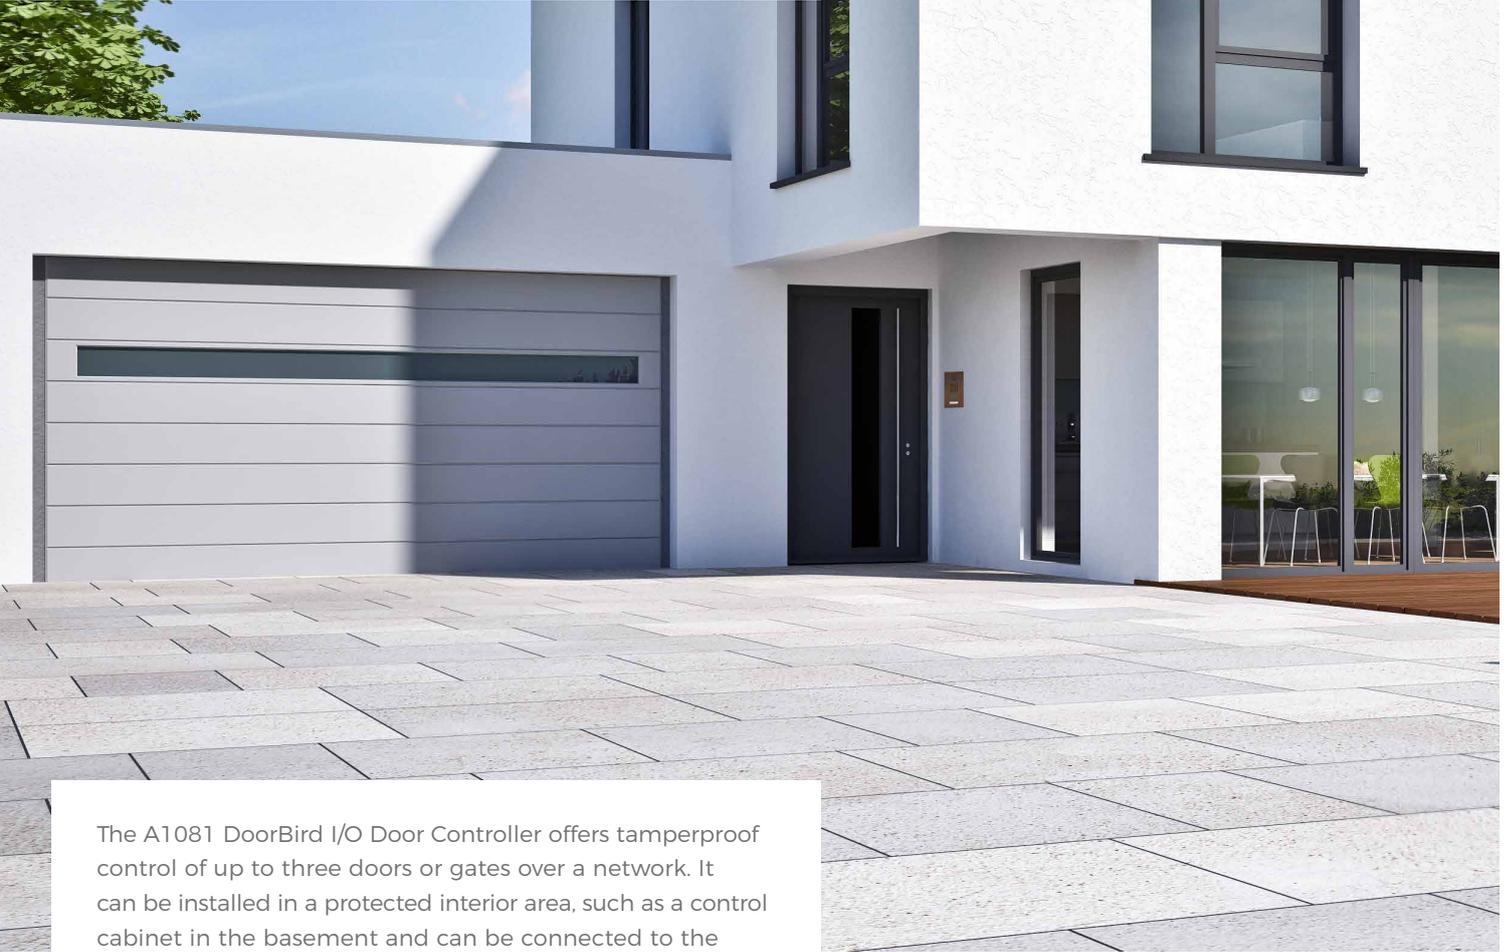


The A1081 DoorBird I/O Door Controller offers tamperproof control of up to three doors or gates over a network. It can be installed in a protected interior area, such as a control cabinet in the basement and can be connected to the DoorBird IP video door station via the network. No physical wires have to be connected between the door or gate and the door station. The DoorBird I/O Door Controller therefore eliminates the risk of shorting and activating the electric door opener in case of unauthorized removal of the door station and makes your property/building safer. The connection of the DoorBird I/O Door Controller to the network can be accomplished via network cable (PoE capability) or WIFI.

All signals between the door station and the DoorBird I/O Door Controller are transmitted tamperproof and encrypted according to banking standards. Up to three electric door openers can be connected to independent and configurable NO/NC relay contacts at the I/O door controller while the wiring remains inaccessible from the outside. Tampering by short circuit or an external voltage source, for example, is therefore preempted. While this type of relay is commonly referred to as isolated safety relay, the DoorBird I/O Door Controller is capable of far more. It is able to monitor whether a door or gate is currently open and offers the possibility to connect and monitor two external sensors such as e.g. a motion sensor or a contact switch. This can be used to actuate a further action, including an alarm push notification to a smartphone or tablet.

There is no limitation concerning the amount of DoorBird I/O Door Controllers that can be connected to a DoorBird IP video door station on a network. All the doors and gates connected to the I/O door controller can be activated via the DoorBird App at any time. That means residents can conveniently open doors and gates from anywhere in the world via smartphone or event configuration (e.g. RFID or keypad code).



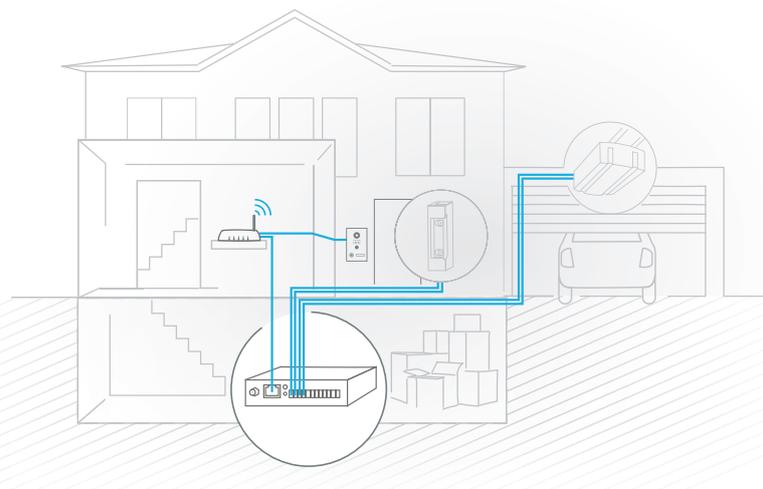

## THE FEATURES

- Tamperproof control of up to three doors or gates
- Encryption based on banking standards
- Monitoring of two external sensors
- Three freely configurable, bi-stable switching relays (permanently open, permanently closed, toggle)
- The switching relays keep their state even in the case of loss of power
- Wireless network, Ethernet, PoE
- Alarm notification via push notification on smartphone and tablet
- Suitable for mounting on walls, ceilings and in control cabinets

## GENERAL

Dimensions	122 x 86 x 32 mm (L x W x H) 4.8 x 3.39 x 1.26 in (L x W x H)
Power supply	15 V DC or power over Ethernet (PoE 802.3af mode A)
Operating conditions	-25 to 55°C / -13 to 131°F
Connectors	SMA, RJ45, 12-pin screw terminal for <ul style="list-style-type: none"> <li>• 15 V DC input (+, -)</li> <li>• Switch relay 1 (max. 1-24 V DC / V AC, 1 ampere)</li> <li>• Switch relay 2 (max. 1-24 V DC / V AC, 1 ampere)</li> <li>• Switch relay 3 (max. 1-24 V DC / V AC, 1 ampere)</li> <li>• External input 1 (potential-free)</li> <li>• External input 2 (potential-free)</li> </ul>
WiFi	2.4 GHz, 802.11 b/g/n, external antenna
PoE	IEEE 802.3 af/at (Mode-A)
System requirements	<p>Mobile end device: latest iOS on iPhone/iPad, latest Android on smartphone/tablet</p> <p>Internet: High-speed landline broadband Internet connection, DSL, cable or fiber, no socks or proxy server</p> <p>Network: 802.11 b/g/n 2.4 GHz or Ethernet Network, with DHCP</p> <p>Compatible with all DoorBird IP Video Door Stations.</p>
Scope of delivery	<p>1 x I/O Door Controller</p> <p>1 x Network Cable</p> <p>1 x Power supply unit (mains adaptor) with four country-specific adaptors (110 - 240 V AC to 15 V DC)</p> <p>1 x DIN-Rail adapter</p> <p>1 x Drilling template</p> <p>1 x Small parts</p>
Approvals	CE, FCC, UL, RoHS, IP50
Weather-proof	No
Weight	174 g
EAN	4260423860346