



## DoorBird Video Door Station D203, Full Stainless-Steel, Flush-Postbox Edition





## Technical data

General		Video	
<b>Housing</b>	Front panel 3,0mm brushed Stainless steel, galvanized steel sheet flush-mounted housing, back powder-coated RAL 9007, door with cylinder lock and 2 keys, extendable slot for different wall strengths	<b>Camera</b>	HDTV 720p, dynamic (VGA – HDTV)
<b>Doorbell button</b>	Stainless-steel button with illuminated LED Ring	<b>Lens</b>	High-end Ultra wide-angle Hemispheric Lens 180° horizontal, 90° vertical, straightened, IR-capable
<b>Nameplate</b>	Illuminated	<b>Night-vision</b>	Yes, Light sensor, Automatic IR-Cut Filter
<b>Mounting type</b>	Flush-mounted	Audio	
<b>Power supply</b>	15VDC (power 110-240VAC) or Power over Ethernet (PoE 802.3af Mode-A)	<b>Audio components</b>	Speaker and microphone, Echo and Noise Canceller
<b>Weight</b>	5kg	<b>Audio streaming</b>	Two-way
<b>Connectors</b>	Power, Electric door opener / strike, Door chime, Door opener button, Network	Network	
<b>Outdoor-ready</b>	Yes, IP54	<b>WiFi</b>	802.11b/g/n 2.4GHz
<b>Approvals</b>	CE, IC, FCC, IP54	<b>Ethernet</b>	Connector
<b>Dimensions</b>	350 x 320 x 260 - 380mm (H x W x D)	Motion sensor	
<b>Operating conditions</b>	- 20 to +40°C Humidity 10 to 85% RH (non condensing)	<b>Type</b>	Passive Infrared sensor (PIR)
<b>Included accessories</b>	Video Door Station, front panel, flush-mounted housing, Power supply unit (world-wide, 110-240V), , DIN-Rail power supply sold separately, Screw package, Quickstart Guide , 2x 1m antenna extension cable, 2x external antenna	<b>Detection angle</b>	180°
<b>EAN</b>	4260423860148	<b>Range</b>	2-8m (dep. on environm.)
Current system requirements		Illumination	
<b>Mobile device</b>	Latest iOS on iPhone /iPad, latest Android on Smartphone or Tablet	<b>Lighting ring</b>	12 intelligent Infrared LEDs
<b>Internet</b>	High-Speed landline broadband Internet connection, DSL, cable or Fiber, min. 500kbs Uploadbandwidth, no Socks- or Proxyserver	<b>Range</b>	2-8m (dep. on environm.)
<b>Network</b>	802.11b/g/n 2.4GHz or Ethernet network, with DHCP	Integrated wireless modules	
<b>Recommended installation height</b>	Camera lens should be at a min. height of 125cm	<b>WiFi</b>	2,4 GHz, external antenna
		<b>RFID</b>	433 MHz, external antenna
		<b>Bluetooth</b>	Available separately
		Optional accessories	
		<b>Sold separately</b>	DIN-Rail Power supply A002, BirdGuard B101
		Special remarks	
		The assembly requires professional skills or technician	



More photos






Technical Drawings

Front panel, data in mm

Material thickness: 3,0

Senkung DIN74-Bm4

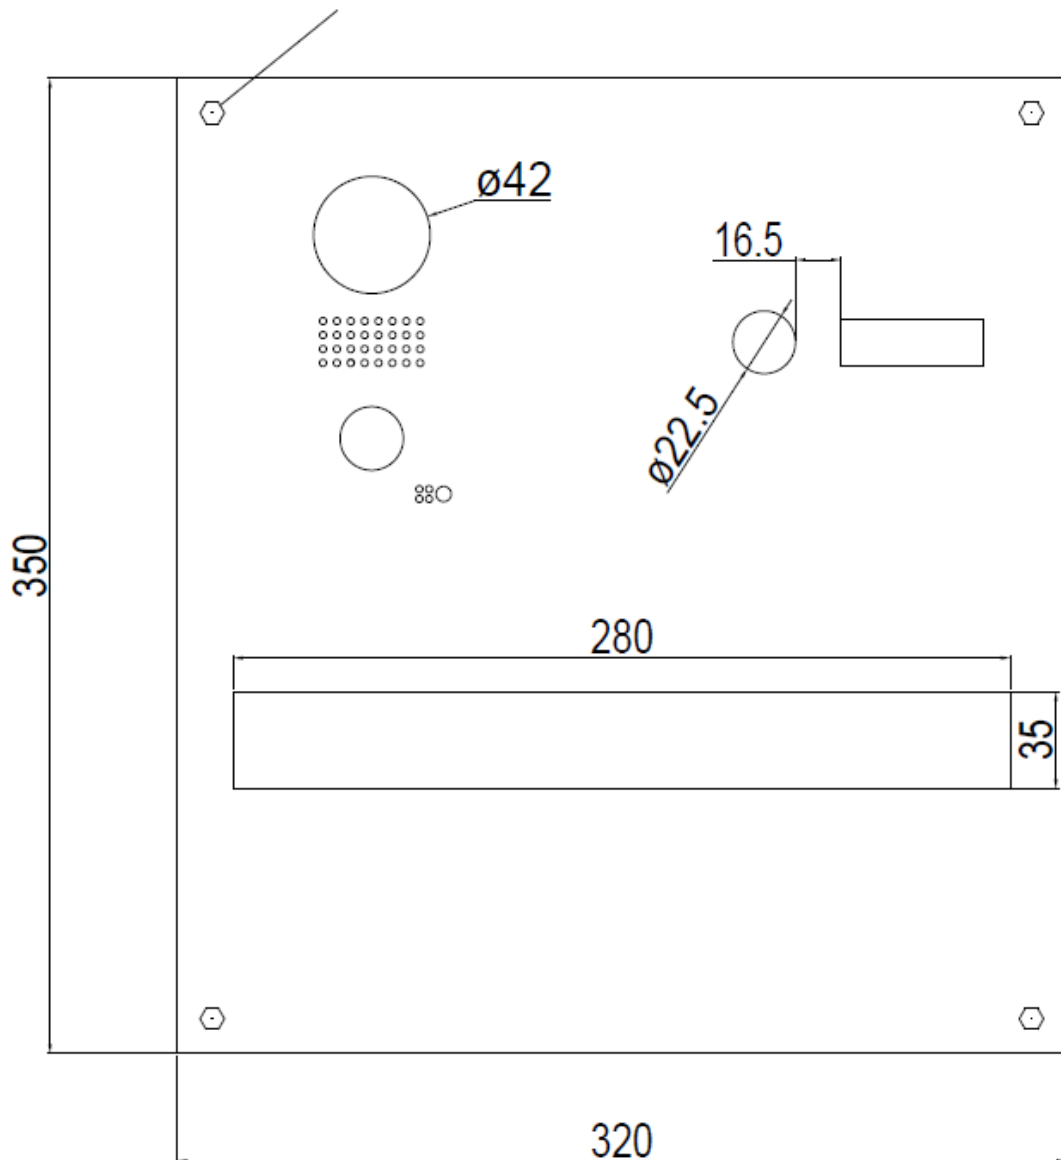



## Mounting housing, data in mm

The installation of the Video Door Station to a wall or fence requires professional skills and suitable tools e.g. drilling machine, drill, dowels and if necessary spacers. These are not included.

