

XTREM H07RN-F

1. Object

This document defines the design and manufacturing characteristics of the cable type H07RN-F manufactured by Top Cable.

2. Design

This type of cable is designed, manufactured and tested in accordance with EN 50525-2-21 and IEC 60245.

Approvals available:

AENOR <HAR>

SASO (Saudi Arabia)

GOST-R Certificate (Russian)

3. Applications

Flexible cable for mobile service. Suitable for installations where the cable must withstand medium mechanical stress, for machines in industrial and agricultural workshops, for motors and transportable machines on construction sites, for wind mills and for agricultural exploitations. Suitable for submerged installations (AD8).

The use up to 1000 V is accepted in fixed protected assemblies.

4. Characteristics



Nominal voltage: 450/ 750 V

Temperatures: Maximum operating: 90 °C

Min. operating: -40 °C (static, with protection)

Min. installation and handling: -25 °C (on cable surface)

Maximum short-circuit temperature: 250 °C. (maximum 5 s.)

Minimum bending radius static: 3 x cable Ø (Ø cable <12 mm)

4 x cable Ø (Ø cable ≥12 mm)


No flame propagation: according to EN 60332-1/ IEC 60332-1

Reaction to fire CPR: Eca according to EN 50575

Submersible Pump Cable for Drinking water: according to AS/NZS 4020

XTREM H07RN-F

5. General make-up of the cable

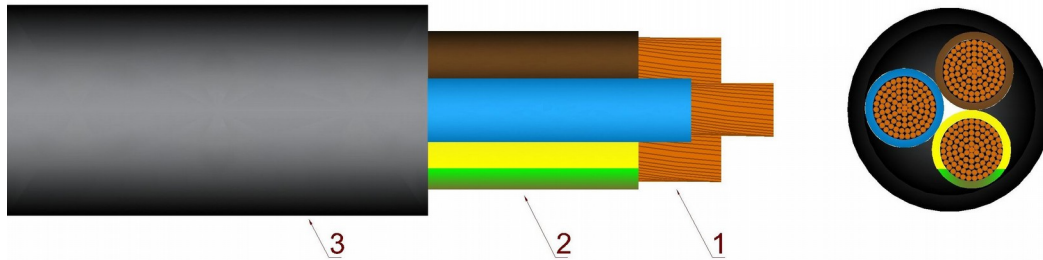

5.1 Conductor (1)

Electrolytic annealed copper conductor, class 5 according to IEC 60228.

5.2 Insulation (2)

Thermosetting rubber insulation, type EI7 according to EN 50363-1.

The standard identification, according to HD 308 and HD 186, is the following:

- 1 x.....natural
- 2 x.....brown + blue
- 3 G.....brown + blue + green/yellow
- 3 x.....brown + black + grey
- 4 G.....brown + black + grey + green/yellow
- 4 x.....brown + black + grey + blue
- 5 G.....brown + black + grey + blue + green/yellow
- 6 or more.....black numbered + green/yellow

5.3 Assembly of cores

The cores are twisted together.

5.4 Outer sheath (3)

Thermosetting rubber outer sheath, black, type EM2 according to EN 50363-2-1.

XTREM H07RN-F

6. Current-carrying capacities

6.1 Nominal current-carrying capacities

The table 1 shows the current-carrying capacities and voltage drop detailed for every cable.

Current-carrying capacities, in amperes, are calculated according to EN 50565 for mobile service and according to IEC 60364-5-52 for fixed installations, and for the following conditions:

- Mobile service: open air, one cable with adequate ventilation and ambient temperature of 30 °C.
- Fixed installation: open air, one cable with adequate ventilation and ambient temperature of 30 °C, supported by cleats and hangers or on perforated tray (reference method F for single-core and E for multicore cables).
- For cables having 2 or 3 cores, it is supposed a single-phase circuit. For the rest of the cables it is supposed a three-phase circuit.
- For cables having 6 or more conductors, it is supposed that not all conductors are fully charged.

For conditions other than this apply the adequate correction factors (see point 6.3).

Voltage drop is calculated for 60 °C conductor temperature and for $\cos \varphi = 1$.

n° x Section (mm ²)	Fixed Inst. (A)	Mobil Inst. (A)	Voltaje drop (V/A·km)	n° x Section (mm ²)	Fixed Inst. (A)	Mobil Inst. (A)	Voltaje drop (V/A·km)
1 x 1,5	21	16	26,7	1 x 95	328	222	0,414
1 x 2,5	29	20	16,6	1 x 120	383	260	0,323
1 x 4	40	30	9,95	1 x 150	444	300	0,259
1 x 6	53	38	6,63	1 x 185	510	341	0,213
1 x 10	74	53	3,84	1 x 240	607	407	0,161
1 x 16	101	71	2,43	1 x 300	703	468	0,129
1 x 25	135	94	1,57	1 x 400	823	553	0,0976
1 x 35	169	117	1,11	1 x 500	946	634	0,0772
1 x 50	207	148	0,776	2 x 1	21	10	45,2
1 x 70	268	185	0,546	2 x 1,5	26	16	30,9

XTREM H07RN-F

n° x Section (mm ²)	Fixed Inst. (A)	Mobil Inst. (A)	Voltaje drop (V/A·km)	n° x Section (mm ²)	Fixed Inst. (A)	Mobil Inst. (A)	Voltaje drop (V/A·km)
2 x 2,5	36	25	18,5	4 G 2,5	32	20	16,0
2 x 4	49	34	11,5	4 G 4	42	30	9,95
2 x 6	63	43	7,66	4 G 6	54	37	6,63
2 x 10	86	60	4,43	4 G 10	75	52	3,84
2 x 16	115	79	2,81	4 G 16	100	69	2,43
2 x 25	149	105	1,81	4 G 25	127	92	1,57
2 x 35	185	130	1,29	4 G 35	158	114	1,11
2 x 50	225	165	0,896	4 G 50	192	143	0,776
2 x 70	289	205	0,631	4 G 70	246	178	0,546
3 G 1	21	10	45,2	4 G 95	298	210	0,414
3 G 1,5	26	16	30,9	4 G 120	346	246	0,323
3 G 2,5	36	25	18,5	4 G 150	399	282	0,259
3 G 4	49	35	11,5	4 G 185	456	319	0,213
3 G 6	63	44	7,66	4 G 240	538	377	0,161
3 G 10	86	62	4,43	5 G 1	17	10	39,2
3 G 16	115	82	2,81	5 G 1,5	23	16	26,7
3 G 25	149	109	1,81	5 G 2,5	32	20	16,0
3 G 35	185	135	1,29	5 G 4	42	30	9,95
3 G 50	225	169	0,896	5 G 6	54	38	6,63
3 G 70	289	211	0,631	5 G 10	75	54	3,84
3 G 95	352	250	0,478	5 G 16	100	71	2,43
3 G 120	410	292	0,373	5 G 25	127	94	1,57
3 G 150	473	335	0,299	5 G 35	158	114	1,11
3 G 185	542	378	0,245	5 G 50	192	143	0,776
4 G 1	17	10	39,2	5 G 70	246	178	0,546
4 G 1,5	23	16	26,7	5 G 95	298	210	0,414

XTREM H07RN-F

n° x Section (mm ²)	Fixed Inst. (A)	Mobil Inst. (A)	Voltaje drop (V/A-km)	n° x Section (mm ²)	Fixed Inst. (A)	Mobil Inst. (A)	Voltaje drop (V/A-km)
5 G 120	346	246	0,323	12 G 2,5	36	25	18,5
7 G 1,5	26	16	30,9	12 G 4	49	34	11,5
7 G 2,5	36	25	18,5	16 G 1,5	26	16	30,9
7 G 4	49	34	11,5	16 G 2,5	36	25	18,5
8 G 1,5	26	16	30,9	18 G 1,5	26	16	30,9
8 G 2,5	36	25	18,5	18 G 2,5	36	25	18,5
8 G 4	49	34	11,5	19 G 1,5	26	16	30,9
10 G 2,5	36	25	18,5	19 G 2,5	36	25	18,5
10 G 4	49	34	11,5	24 G 1,5	26	16	30,9
12 G 1,5	26	16	30,9	24 G 2,5	36	25	18,5

Table 1

6.2 Short-circuit current-carrying capacities

The maximum short-circuit current that a cable can withstand depend on the time of reaction of the protection elements installed in the line. The maximum current capacity in a short-circuit accident, for a specific type of cable, is the result of multiplying the cross section of the cable for the values shown in table 2. These values are taken from IEC 949.

Time (s)	0,1	0,2	0,3	0,5	1	1,5	2	2,5	3
A/mm ²	452	320	261	202	143	117	101	90	83

Table 2

6.3 Correction factors

The current-carrying capacities must be multiplied with the adequate correction factor, when the installation conditions differs from point 6.1

Correction factors for air temperature other than 30°C.

Air T. (°C)	30	35	40	45	50	55
Mobil service	1	0,91	0,82	0,71	0,58	0,41
Fixed installation	1	0,96	0,91	0,87	0,82	0,76

Table 3

XTREM H07RN-F

7. Dimensions

Table 4 shows diameter and weight detailed for every cable.

n° x Section (mm ²)	Diameter (mm)	Weight (kg/km)	n° x Section (mm ²)	Diameter (mm)	Weight (kg/km)
1 x 1,5	5,9	45	2 x 70	35,8	2.335
1 x 2,5	6,5	60	2 x 25	24,8	1.010
1 x 4	7,4	85	2 x 35	27,4	1.295
1 x 6	8,2	110	2 x 50	32,0	1.780
1 x 10	10,0	170	3 G 1	8,2	95
1 x 16	11,2	235	3 G 1,5	9,2	125
1 x 25	13,2	350	3 G 2,5	10,9	185
1 x 35	14,7	465	3 G 4	12,4	260
1 x 50	17,0	630	3 G 6	14,4	350
1 x 70	18,9	840	3 G 10	19,4	625
1 x 95	21,4	1.100	3 G 16	21,8	855
1 x 120	23,3	1.370	3 G 25	26,0	1.255
1 x 150	25,8	1.685	3 G 35	29,2	1.655
1 x 185	28,1	2.040	3 G 50	33,5	2.235
1 x 240	31,3	2.615	3 G 70	37,3	2.970
1 x 300	34,5	3.275	3 G 95	44,0	3.935
1 x 400	39,3	4.275	3 G 120	47,5	4.840
1 x 500	43,2	5.410	3 G 150	52,8	5.985
2 x 1	7,5	80	3 G 185	57,7	7.210
2 x 1,5	8,3	100	4 G 1	9,0	120
2 x 2,5	9,8	145	4 G 1,5	10,3	160
2 x 4	10,9	195	4 G 2,5	11,9	230
2 x 6	12,4	265	4 G 4	13,8	320
2 x 10	17,5	485	4 G 6	15,6	435
2 x 16	19,5	650	4 G 10	21,4	770

XTREM H07RN-F

n° x Section (mm ²)	Diameter (mm)	Weigth (kg/km)
4 G 16	24,3	1.075
4 G 25	29,5	1.620
4 G 35	32,5	2.105
4 G 50	37,4	2.875
4 G 70	41,8	3.825
4 G 95	47,4	4.980
4 G 120	52,3	6.165
4 G 150	57,5	7.605
4 G 185	63,1	9.205
4 G 240	72,1	12.030
5 G 1	9,8	145
5 G 1,5	11,1	190
5 G 2,5	13,2	280
5 G 4	15,3	400
5 G 6	17,7	545
5 G 10	23,7	945
5 G 16	26,9	1.320
5 G 25	32,9	1.995
5 G 35	35,8	2.560
5 G 50	42,2	3.575
5 G 70	46,7	4.715

n° x Section (mm ²)	Diameter (mm)	Weigth (kg/km)
5 G 95	52,5	6.105
5 G 120	57,2	7.500
7 G 1,5	14,5	305
7 G 2,5	16,6	425
7 G 4	20,2	635
8 G 1,5	15,5	350
8 G 2,5	18,4	505
8 G 4	21,8	735
10 G 2,5	19,2	560
10 G 4	22,8	830
12 G 1,5	17,1	445
12 G 2,5	19,6	635
12 G 4	24,3	945
16 G 1,5	19,6	580
16 G 2,5	22,5	840
18 G 1,5	20,2	635
18 G 2,5	23,3	910
19 G 1,5	21,1	670
19 G 2,5	25,1	995
24 G 1,5	23,1	810
24 G 2,5	27,0	1.180

Table 4