



The Heatmiser neoHub Gen 2 is the gateway to the Neo system, providing remote control of all Neo series models, enabling you to control your multi zone heating, hot water and appliances from anywhere.

NeoHub is compatible with all neo series models, neoStat, neoStat-e, neoStat-hw, neoAir, neoAir-V2M, neoStat-HC, neoStat-HC1 & neoPlug.

Headline Information

Real time temperature display

- Edit your heating levels
- Edit your hot water times
- Lock your thermostat
- Hold a temperature
- Create temperature Profiles

Compatible with

All neoStat Series Models

Connection method

Mobile Data and WiFi Networks

Router

Use your own WiFi router to connect to neoHub using our smartphone and tablet applications

Apps

Free to download from the Apple App Store or Google Play Store.

Total control from anywhere using your smartphone.



Key Features



Local Control (In case of loss of Broadband Connection)

Should the internet connection fail, the heating system can still be operated within the home by using the thermostat keypad. As soon as the internet connection is restored, your neoHub will automatically logon to the Cloud Server re-enabling app control.



Multi-Zone

The Heatmiser Neo Network system has been built from the ground up with multi-zone homes in mind. The neoHub coordinates the data between each neoStat thermostat on the network.



Plug and Play

The neoHub connects directly to a spare port on your router, obtaining an I.P. Address and joining itself to your home network. It has been designed to be simple to install and setup, and is compatible with broadband connections with Dynamic I.P. Addresses. The neoHub connects to our Cloud Server eliminating any complex setup requirements including port forwarding.

API

API - Third Party Integration

Our published API (JSON) makes it easy for third party integration companies to integrate our Neo Network System with leading home automation brands products from companies such as Control4 and Crestron.



Multi-Locations





During the installation of the app, you are prompted to create an account on the Heatmiser Cloud Server after which multiple locations can be created. Logging into to your account from another device will present all of your Locations for quick and easy access.

FEATURES

Connectivity
Max No of devices
Mounting
Aerial
Power
Dimensions

NEOHUB

Wireless Mesh Network
32
Wall & Desk
Built in
12v DC Adaptor Supplied
170mm(W) x 91mm (H) x 25.5mm(D)

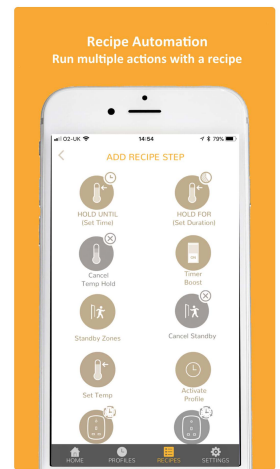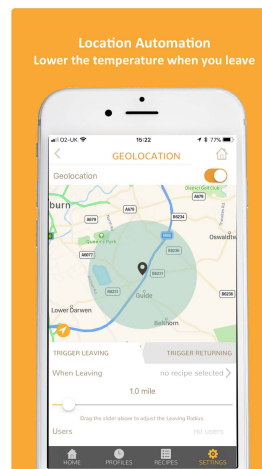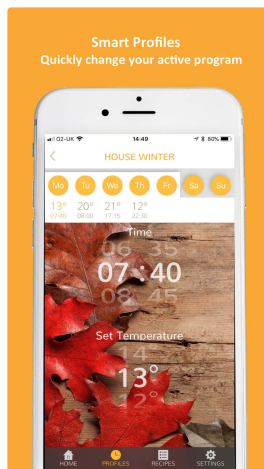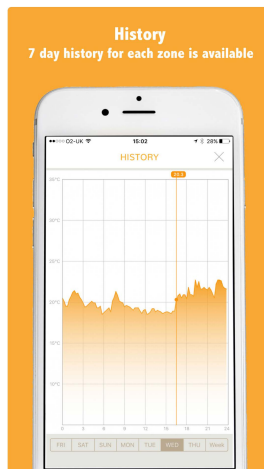

Product Dimensions (mm)

